

ABOUT **BOSS**® PRODUCTS

MADE TO WORK

BOSS® PRODUCTS manufactures and packages sealants, adhesives and foams. BOSS® technology and quality ensure these products will perform to the highest levels for industrial, construction, pool & spa, HVAC/R, and manufactured housing and RV markets.

Since our start in 1970, in Elizabethtown, Kentucky, we have been customer driven. Our 200,000 sq. ft. state-of-the-art facility and in-house Research and Development Lab provide first-class service to our customers. We also have a full-time Technical Sales Department available for on-site consultation.

BOSS® PRODUCTS is a ISO 9001 certified manufacturer of:

- Silicones
- Latexes
- Polyurethanes
- Silicone Lubricants
- PU Foam Sealants
- Hand Cleaners
- Aerosols

Today's construction and industrial projects demand sealants, adhesives and lubricants that not only work – but excel. The BOSS® line of products meets the needs of the most demanding applications.



High quality products.
Commitment to technical innovation.

Make BOSS® Products your single source.



BOSS® PRODUCTS
350 Ring Road • Elizabethtown, KY 42701
1-800-924-BOSS (2677) • Emergency Phone Chemtrec (800) 424-9300
www.bossproducts.com

Made in Belgium

BOSS 2-Part HFO Foam / 012621

BOSS® PRODUCTS

2-Part HFO Foam

MADE TO WORK®



THE FUTURE OF
**SPRAY
FOAM
INSULATION
IS NOW!**

Patent-pending formula has 1,000 times
lower impact on global warming vs HFC

Call the **BOSS**® 800-928-BOSS

WE DEVELOP IT! WE MAKE IT! WE CERTIFY IT!



BOSS® PRODUCTS • 350 Ring Road, Elizabethtown, KY 42701, USA • 270-769-3385 • 800-928-2677 • FAX 270-765-2412 • www.bossproducts.com

2-PART HFO FOAM

BOSS® 2200/2600 2-Part HFO Foam / BOSS® 2284/2684 2-Part HFO Foam (Fire-Rated)

These products are based off a patented formula containing an HFO (Hydro Fluoro Olefin) blowing agent that has a global warming potential of 1, compared to the blowing agent currently used by the competition having a global warming potential of over 1,000. That's right...BOSS® 2-Part HFO Foam is 1,000 times better for the environment as compared to the competition, and there is no sacrifice in performance and no upcharge as is typically seen with better environmental performance. The BOSS® 2-Part HFO Foam family of new spray foam products will have a density of 1.75 lbs/ft³, an initial R value of 6.9 per inch, and will have a shelf life of 12 months from date of shipment. Also, BOSS® 2-Part HFO Foam will offer a patented dispense system, including a mix nozzle that reduces the potential for back-flow from either component and minimizes the risk of clogging during the application. These features will help the user obtain a more consistent and high-quality foam.

Systems Types

BOSS® 2-Part HFO Foam is a high quality 2-component polyurethane spray foam for filling and sealing in professional and industrial applications. It is supplied in two portable, disposable and pressurized cylinders requiring no external power source, no extra pressure and no pumps. The patent-pending dispensing gun is equipped with specially developed nozzles, assuring a high-quality foam is produced.

- High R-value that reduces heating and cooling costs
- No VOCs, non-flammable, <1 GWP, and ODP of 0
- Great for acoustic insulation
- Cures in minutes
- No shrinkage or expansion after curing
- Great adhesion to a variety of surfaces
- 200 boardfoot and 600 boardfoot sizes for different job sizes
- Disposable canisters that require no external power source

1 box, 2 canisters approx. 42 lb 337721 Champagne
2 boxes, 2 canisters each approx. 55 lb XXXXXX Champagne

1 box, 2 canisters approx. 42 lb 337721 Champagne
2 boxes, 2 canisters each approx. 55 lb XXXXXX Champagne




- Patent-pending formula containing HFO blowing agent
- HFO has 1,000 times lower impact on global warming vs HFC
- Many states plus Canada have restrictions on HFC-containing products
- No sacrifice in performance



	BOSS 2200	BOSS 2284	BOSS 2600	BOSS 2684
Theoretical Yield	185	185	615	615
Density (lb/ft ³) ASTM D1622	1.75	1.75	1.75	1.75
Gel time (s)	30	30	30	30
Thermal resistance per inch (R value), initial, ASTM C518"	6.9	6.9	6.9	6.9
"Flame spread/smoke developed @ 4" wide by 2" thick ASTM E84/UL723	not approved	20/195	not approved	20/195
Shelf life	12 months	12 months	12 months	12 months
Closed Cell Content	>90%	>90%	>90%	>90%
Cutttable	2 - 5 minutes	2 - 5 minutes	2 - 5 minutes	2 - 5 minutes

2-PART HFO FOAM

WHERE TO USE

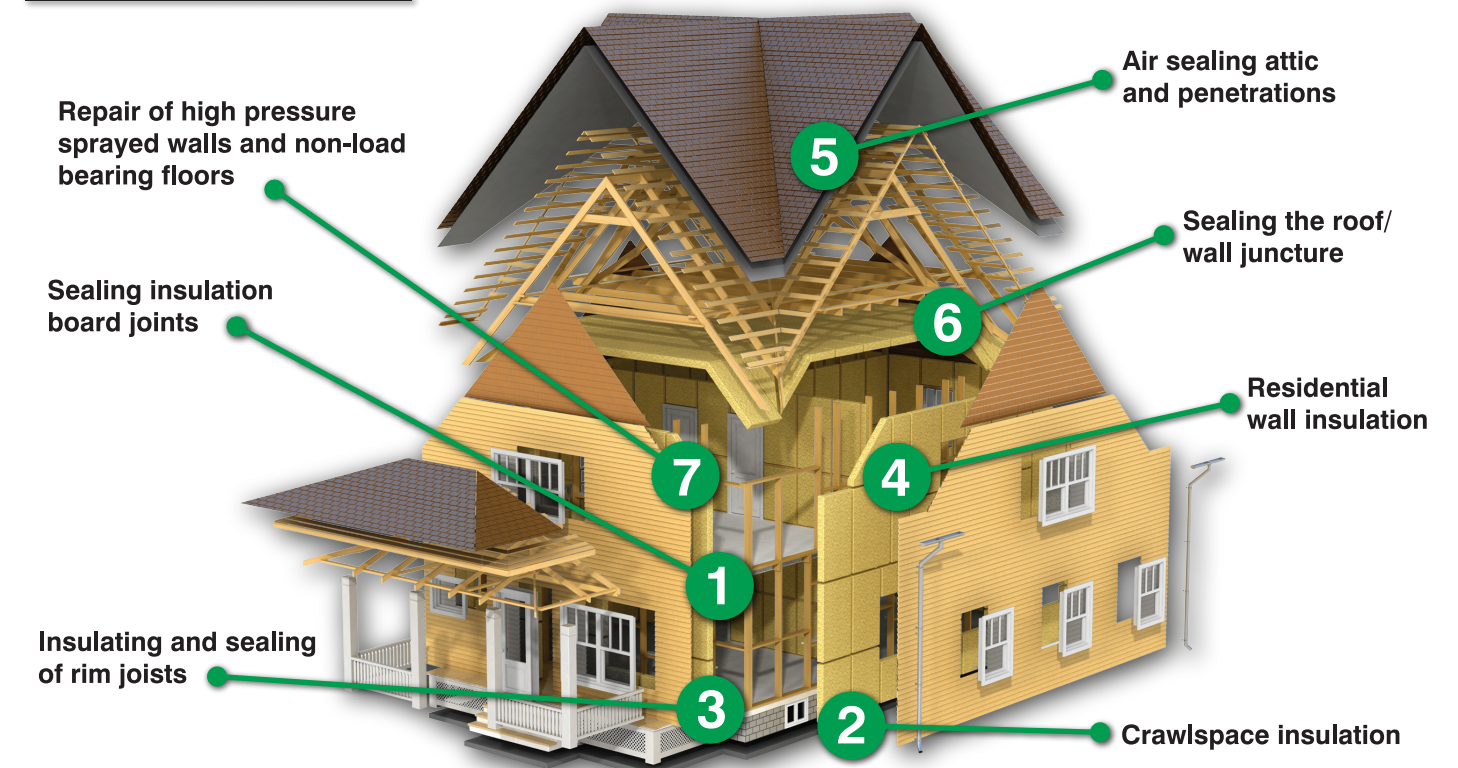

GUN/HOSE ASSEMBLY ACCESSORIES KIT

- 1 box of approx. 1.75 lb
- 2 hoses, each 9 ft (15 & 30 ft also available)
- 1 Soudal dispensing gun
- 12 nozzles (8 cone & 4 fan)
- Tube gun lubricant
- Wrench



DISPENSING GUN

- Patent-pending dispense system helps eliminate back-flow from either component
- Delivers more consistent and high-quality foam
- Product has initial R value of 6.9 per inch and 1.75 lbs/ft³

